

Condensing Unit

Technical Data Sheet

Model CMPT14LA_N
Voltage 220-240V 50Hz ~1
Refrigerant R404A

APPLICATION

Application	Low Back Pressure
Refrigerant	R404A
Evaporating Temp.	-40,0 °C to -10,0 °C
Expansion	Capillar/Valve
Comp. Cooling	Fan cooled
Max. ambient temp.	43,0 °C

COMPRESSOR

Displacement	14,32 cm³
Diameter	29,37 mm
Stroke	21,13 mm
Oil type	ISO VG 32 ESTER
Oil charge	400 cm³

MOTOR

Nominal Power	1/2 hp
Voltage/Frequency	220-240V 50Hz
Voltage range	187-264 V
Type	CSR
Phase number	1 PH
Locked Rotor Amps (LRA)	16,00 A
Max. Cont. Current (MCC)	5,00 A
Main W. resist. at 25°C	5,02 Ω
Start W. resist. at 25°C	9,67 Ω

NOMINAL PERFORMANCE

ASHRAE

Cooling Capacity	743 W
COP	1,39 W/W
EER	1,19 kCal/Wh
Input Power	535 W
Current	1,98 A

TEST CYCLE CONDITIONS


LBP

Evaporating temp. (T _e)	-23,3 °C
Condensing temp. (T _c)	55,0 °C
Liquid temp. (T _{liq.})	32,0 °C
Ambient temp. (T _{amb.})	32,0 °C
Suction temp. (T _{suction})	32,0 °C
Voltage/Frequency	220 V 50 Hz

CONDENSER AND FAN DATA

Condenser type	CU-AL
Condenser model	9T 4R
Fan blade (Ø mm / °)	230 / 28
Fan motor	10W 230V 50/60Hz

WIRING DIAGRAM

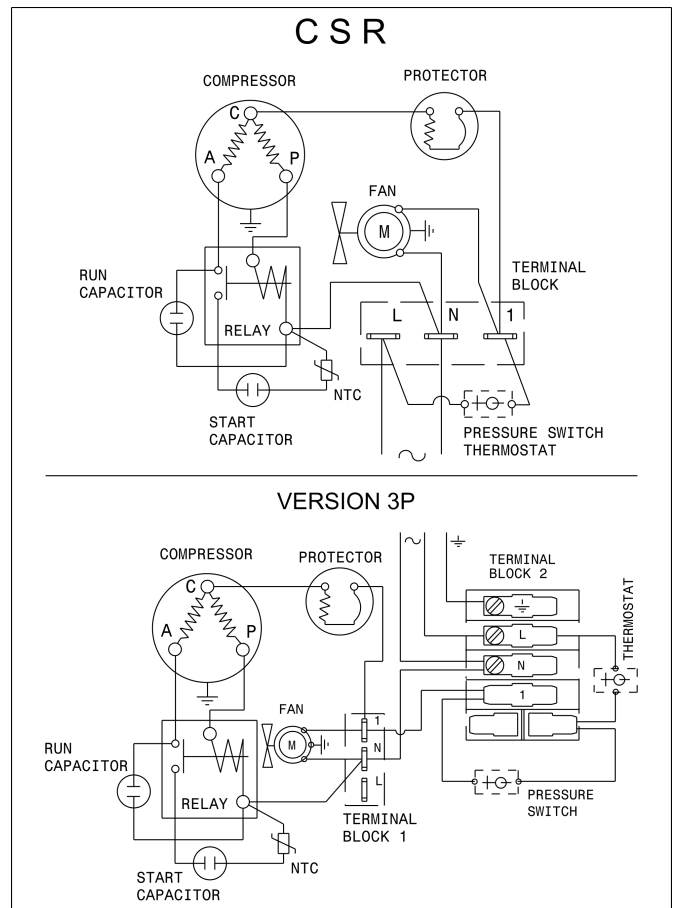

REFRIGERATION CAPACITY (W)

Evaporating Temperature (°C)

Model	Motor	-40	-35	-30	-25	-23.3			-10
						W	Winp	A	
CMPT14LA_N	CSR	378	499	586	734	743	535	1.98	1093

ASHRAE LBP: Condensing temperature: 55°C, Liquid temperature: 32°C, Suction temperature: 32°C, Ambient temperature: 32°C





Condensing Unit

Technical Data Sheet

VERSIONS

VERSION 1	VERSION 2	VERSION 3	VERSION 3P	VERSION 4
Tube	Service valve	Service valve and receiver	Service valve, receiver, pressure switch	Schrader valve on the service port
Suction tube internal diam.: 8,1 mm	Suction valve: 3/8"	Receiver vol.: 1,1 l	Receiver vol.: 1,1 l	Suction tube internal diam.: 8,1 mm
Discharge tube internal diam.: 6,5 mm	Discharge valve: 3/8"	Suction valve: 3/8"	Suction valve: 3/8"	Discharge tube internal diam.: 6,5 mm
Net Weight: 22,6 Kg	Net Weight: 23,1 Kg	Discharge valve: 3/8"	Discharge valve: 3/8"	Net Weight: 22,6 Kg
		Net Weight: 23,9 Kg	Net Weight: 25,0 Kg	

DIMENSIONS (Version 3 drawing)

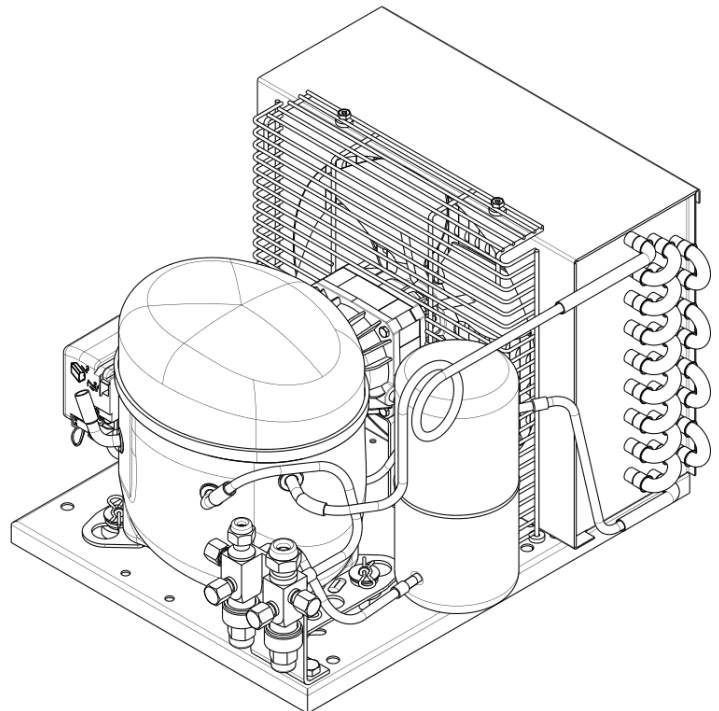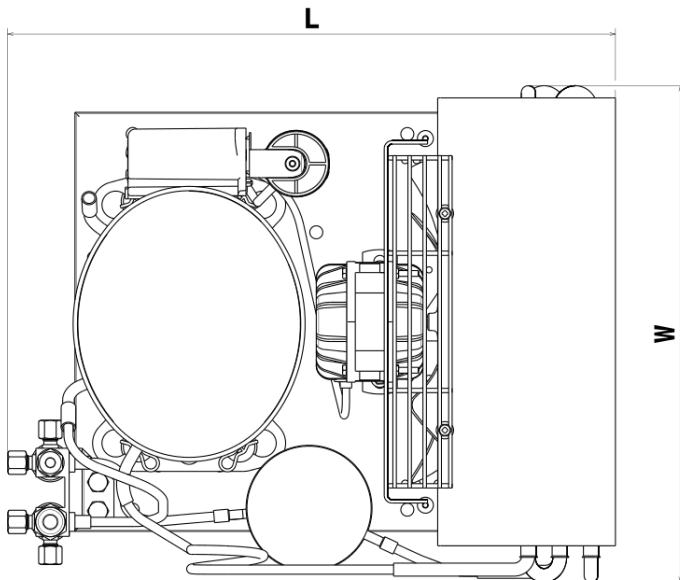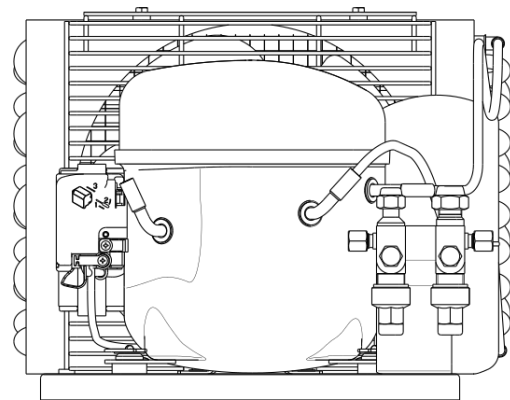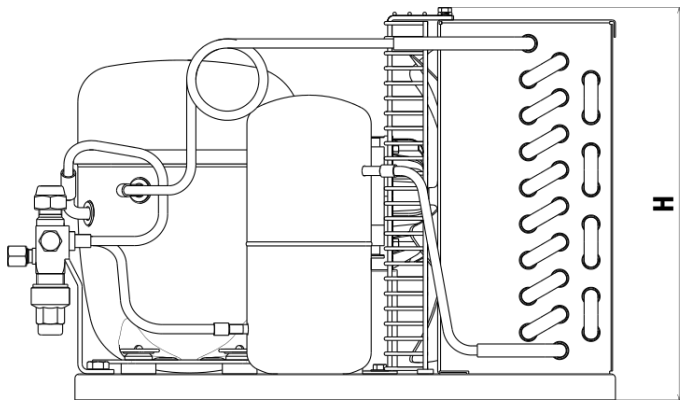

VERSION 1-4 (WxLxH) (mm)	VERSION 2 (WxLxH) (mm)	VERSION 3 (WxLxH) (mm)	VERSION 3P (WxLxH) (mm)
325x415x275	325x425x275	335x425x275	335x465x275